


I/O Expansion board Release Note: Mar/19/2004

Pin Assignment of I-8112:

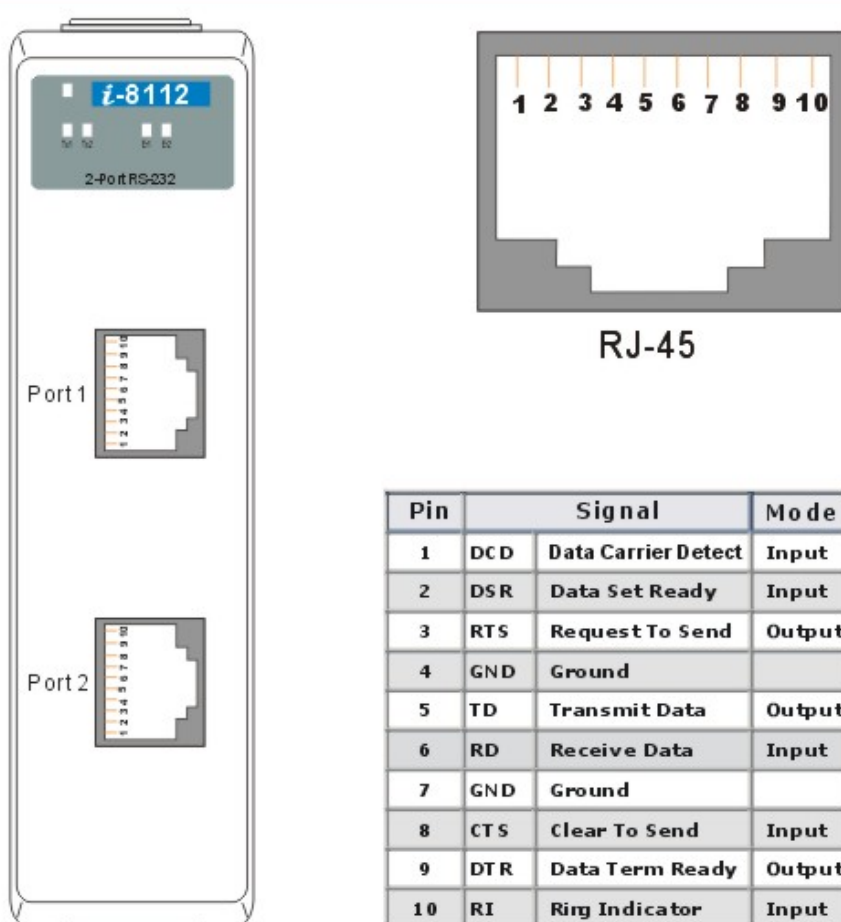

The diagram illustrates the I-8112 expansion board, which features two RJ-45 ports labeled Port 1 and Port 2. A detailed view of an RJ-45 connector shows pins 1 through 10. The board is labeled 'I-8112' and '2-Port RS-232'.

Pin	Signal	Mode
1	DCD Data Carrier Detect	Input
2	DSR Data Set Ready	Input
3	RTS Request To Send	Output
4	GND Ground	
5	TD Transmit Data	Output
6	RD Receive Data	Input
7	GND Ground	
8	CTS Clear To Send	Input
9	DTR Data Term Ready	Output
10	RI Ring Indicator	Input

Technical Service:

Email problem-report to service@icpdas.com if you have any questions.