


Screw Terminal Board




DB-8025 Screw Terminal Board

DB-8025 is equipped with two 20-pin flat-cable connectors
Blank pads for break detection, low-pass filter, current shut and voltage attenuation
Compatible to 780 series daughter board
Dimensions: 102 mm x 114 mm

Ordering Information Standard

- DB-8025:** Screw terminal board with two CA-2010 cable
- Optional**
- CA-2020:** 20-pin flat cable, 2m

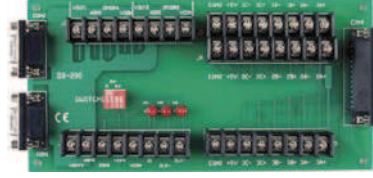


DB-200

DB-200 is equipped with one 25-pin D-Sub connector and two 9-pin D-Sub connectors
Dimensions: 190 mm x 75 mm

Ordering Information Standard

- DB-200:** Encoder interface board for SERVO-300 with one CA-0915, CA-2520 cable & CA-0920 cable
- Optional**
- CA-2520:** 25-pin Male-Male D-sub flat cable, 2m
- CA-0920:** 9-pin Male-Male D-sub cable, 2m



DB-8425 Screw Terminal Board

9-pin D-Sub connector pin-to-pin screw terminal for PISO-DA2
Dimensions: 103 mm x 86 mm

Ordering Information Standard

- DB-8425:** Screw terminal board for PISO-DA2 with two CA-0920 cable
- Optional**
- CA-0920:** 9-pin Male-Male D-sub cable, 2m




DB-8R

DB-8R is equipped with one 25-pin D-Sub connector
7-relay output, 8 isolated digital input X, Y limit switch input, emergency input
Dimensions: 190 mm x 105 mm

Ordering Information Standard

- DB-8R:** Motion interface I/O board with CA-2520 cable
- Optional**
- CA-2520:** 25-pin Male-Male D-sub flat cable, 2m




DB-37 Screw Terminal Board

37-pin D-sub connector pin-to-pin screw terminal for any 37-pin D-sub connector of I/O board
Dimensions: 130 mm x 78 mm

Ordering Information Standard

- DB-37:** Direct connection board



DB-3R

DB-3R is equipped with one 9-pin D-Sub connector and 3-relay outputs
Dimensions: 103 mm x 86 mm

Ordering Information Standard

- DB-3R:** Daughter board for WDT-03 with one CA-0915 cable
- Optional**
- CA-0915:** 9-pin Male-Female D-sub cable, 1.5m