


## Standalone CANopen Master Module



**I-87123**

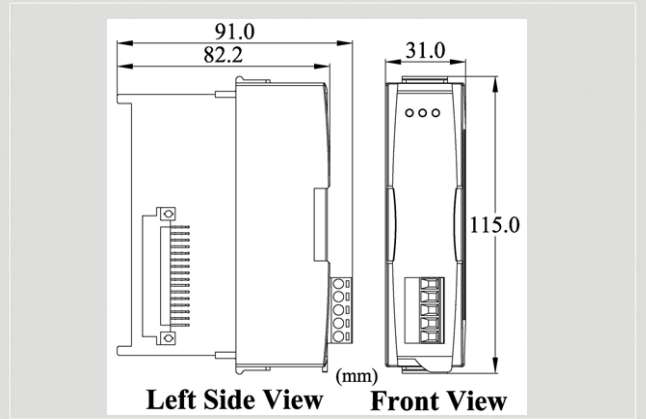


**Dimensions**

The I-87123 was developed as a standardized embedded network with highly flexible configuration capabilities. It provides standardized communication objects for real-time data (Process Data Objects, PDO), configuration data (Service Data Objects, SDO), network management data (NMT message, and Error Control), and special functions (Time Stamp, Sync message, and Emergency message). Nowadays, CANopen is used in many various application fields, such as medical equipment, off-road vehicles, maritime electronics, public transportation, building automation and etc.

### Features


- NMT: Master
- CANopen Version: DS-301 v4.02
- Error Control: Support Guarding and Heartbeat protocol
- Support EMCY receiving
- Provide dynamic PDO functions
- Support SYNC protocol
- Transmission type of PDO is supported
- Support SDO download/upload segment protocol
- 256 records CANopen message reception buffer
- CAN, ERR, and Tx/Rx LED indicator
- Support I-8000/WinPAC/ViewPAC series MCU

### LED Indicators

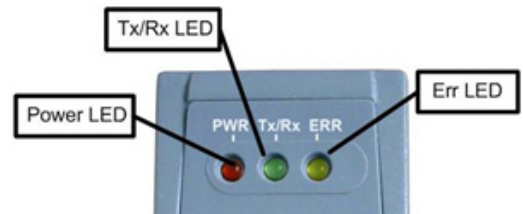

LED.	Description
PWR	Indicate power status
Tx/Rx	Indicate CAN messages transmission
ERR	Indicate the error status


### Design Flowchart

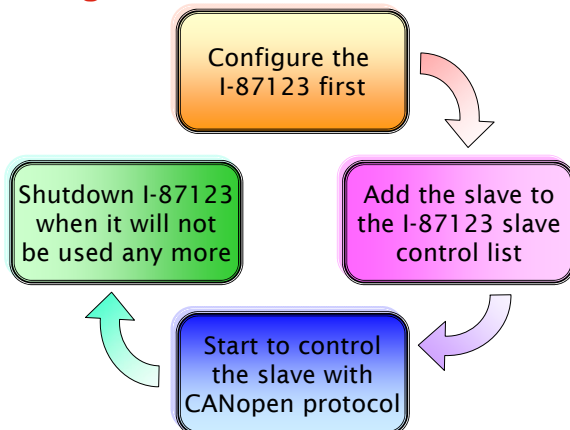

### Pin Assignments

Pin No.	Description
1	No use
2	CAN high bus line
3	CAN Shield
4	CAN low bus line
5	No use


### Terminal Resister Switch

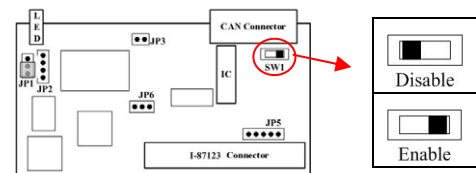

## Hardware Specifications

<b>Hardware</b>	
CPU	80186, 80 MHz or compatible
SRAM/Flash/EEPROM	512 KB / 512 KB / 2 KB
<b>CAN Interface</b>	
Controller	NXP SJA1000T with 16 MHz clock
Transceiver	NXP 82C250
Channel number	1
Connector	5-pin screwed terminal block (CAN_GND, CAN_L, CAN_SHLD, CAN_H, N/A)
Baud Rate (bps)	10 k, 20 k, 50 k, 125 k, 250 k, 500 k, 800 k, 1 M (allow user-defined baud rate)
Transmission Distance (m)	Depend on baud rate (for example, max. 1000 m at 50 kbps )
Isolation	3000 V <sub>DC</sub> for DC-to-DC, 2500 V <sub>rms</sub> for photo-couple
Terminator Resistor	Jumper for 120 Ω terminator resistor
Specification	ISO 11898-2, CAN 2.0A and CAN 2.0B
Protocol	CANopen DS-301 ver4.02, DS-401 ver2.1
<b>Bus Interface</b>	
Type	Serial I/O module
<b>LED</b>	
Round LED	PWR LED, RUN LED, ERR LED
<b>Software</b>	
Driver	I-8000, WinPAC, ViewPAC
Library	TC/BC
<b>Power</b>	
Power supply	Unregulated +10 ~ +30 V <sub>DC</sub>
<b>Mechanism</b>	
Dimensions	31mm x 115mm x 91mm (W x L x H)
<b>Environment</b>	
Operating Temp.	-25 ~ 75 °C
Storage Temp.	-30 ~ 80 °C
Humidity	10 ~ 90% RH, non-condensing

## Applications

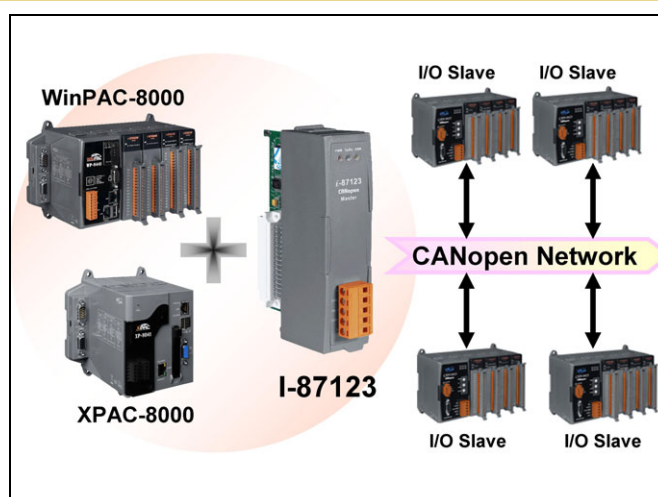

## Ordering Information

<b>I-87123</b>	Module with one CANopen CAN port, 80186 80MHz CPU, 512K flash, 512K SRAM, 120Ω terminal resistor selected by jumper.
----------------	--