


# PIO-D48U/PIO-D48SU

Universal PCI, 48-channel Digital I/O Board



PIO-D48U

PIO-D48SU

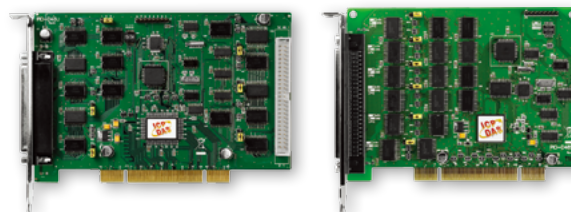

## Features

- Universal PCI (3.3 V/5 V) Interface, Plug & Play
- 48 Buffered TTL Digital I/O Lines
- Six 8-bit Bi-directional Programmable I/O Ports
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- All I/O Lines Buffered on the Board
- 4-channel Interrupt Source
- Buffer Output for Higher Driving Capability
- Supports Card ID (SMD Switch)
- Supports DO Status Readback (Register Level)
- DI/O Response Time is about 1  $\mu$ s (1 MHz)

## Introduction

The PIO-D48U/D48SU card is designed to be fully compatible with the PIO-D48, meaning that a PIO-D48 card can be directly replaced with a PIO-D48U/D48SU without requiring any modification to the software or the driver.

The PIO-D48U provides two connectors for I/O wiring, while the PIO-D48SU provides a single high-density connector that reduces the amount of installation space required for the card in the computer.

The PIO-D48U/D48SU supports the 3.3 V/5 V PCI bus, and provides 48 TTL Digital I/O lines that are grouped into six 8-bit bi-directional ports. Each group of three 8-bit ports is arranged on the connector as Port A (PA), Port B (PB) and Port C (PC), and Port C can be split into two nibble-wide (4-bit) parts. All ports are configured as inputs on power-up or after a reset.

The PIO-D48U/D48SU card also includes an onboard Card ID switch and pull-high/low resistors for the Digital Input. The Card ID switch can be set so that the board is able to be recognized via software if two or more boards are installed in the same computer. The pull-high/pull-low resistors allow the DI status to be predefined as either high or low instead of remaining floating if the DI channels are disconnected or interrupted.

## Hardware Specifications

Model	PIO-D48U	PIO-D48SU
<b>Programmable DIO</b>		
Channels	48	
<b>Digital Input</b>		
Compatibility	5 V/TTL	
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.	
Response Speed	1 MHz	
<b>Digital Output</b>		
Compatibility	5 V/TTL	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 64 mA @ 0.8 V; Source: 32 mA @ 2.0 V	
Response Speed	1 MHz	
<b>Timer/Counter</b>		
Channels	2 (Event timer x1/ 32-bit Timer x1)	
Resolution	16-bit	
Reference Clock	Internal: 4 MHz	
<b>General</b>		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1 50-pin Box Header x 1	Female SCSI II 100-pin x 1
Power Consumption	900 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

## Ordering Information

PIO-D48U CR	Universal PCI, 48-channel Digital I/O Board (RoHS).
PIO-D48SU CR	Universal PCI, 48-channel Digital I/O Board (SCSI II Connector, RoHS).

## Software

### Drivers

- 32/64-bit Windows XP/2003/2008/Vista/7/8
- Linux
- DASYLab

### Sample Programs

- DOS Lib and TC Demo
- LabVIEW Toolkit
- VB/VC/Delphi/BCB/MATLAB Demo
- VB.NET/C#.NET/VC.NET Demo

## Pin Assignments

PIO-D48U			PIO-D48SU		
Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20	PA_00	01	51
N.C.	02	21	PA_01	02	52
PB_7	03	22	PA_02	03	53
PB_6	04	23	PA_03	04	54
PB_5	05	24	PA_04	05	55
PB_4	06	25	PA_05	06	56
PB_3	07	26	PA_06	07	57
PB_2	08	27	PA_07	08	58
PB_1	09	28	PB_00	09	59
PB_0	10	29	PB_01	10	60
GND	11	30	PB_02	11	61
N.C.	12	31	PB_03	12	62
GND	13	32	PB_04	13	63
N.C.	14	33	PB_05	14	64
GND	15	34	PB_06	15	65
N.C.	16	35	PB_07	16	66
GND	17	36	PC_00	17	67
+5 V	18	37	PC_01	18	68
GND	19		PC_02	19	69
			PC_03	20	70
			PC_04	21	71
			PC_05	22	72
			PC_06	23	73
			PC_07	24	74
			GND	25	75
				26	76
				27	77
				28	78
				29	79
				30	80
				31	81
				32	82
				33	83
				34	84
				35	85
				36	86
				37	87
				38	88
				39	89
				40	90
				41	91
				42	92
				43	93
				44	94
				45	95
				46	96
				47	97
				48	98
				49	99
				50	100
					+5 V

3  
5  
PCI Bus Data Acquisition Boards