

▶▶▶▶ CA-9-2505D

Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
N/A	01	14 COM8_RxD
N/A	02	15 COM8_TxD
COM8_GND	03	16 COM7_RxD
N/A	04	17 COM7_TxD
COM7_GND	05	18 COM6_RxD
N/A	06	19 COM6_TxD
COM6_GND	07	20 COM5_RxD
N/A	08	21 COM5_TxD
COM5_GND	09	22 COM4_RxD
N/A	10	23 COM4_TxD
COM4_GND	11	24 COM3_RxD
N/A	12	25 COM3_TxD
COM3_GND	13	Shield F.G.

25-Pin Male D-Sub Connector

Pin Assignment	Terminal No.	Pin Assignment
GND	05	09 --
--	04	08 --
TxD	03	07 --
RxD	02	06 --
--	01	

RS-232 Female DB-25 to Male DB-9 Connector



Ordering Information

CA-9-2505D	Male DB-25 to 6 Male DB-9 Cable, 0.5 m
------------	--

▶▶▶▶ CA-9-3705
CA-9-3715D

Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20 RI3
DCD3	02	21 DTR3
GND	03	22 DSR3
CTS3	04	23 RTS3
RxD3	05	24 TxD3
RI4	06	25 DCD4
DTR4	07	26 GND
DSR4	08	27 CTS4
RTS4	09	28 RxD4
TxD4	10	29 RI2
DCD2	11	30 DTR2
GND	12	31 DSR2
CTS2	13	32 RTS2
RxD2	14	33 TxD2
RI1	15	34 DCD1
DTR1	16	35 GND
DSR1	17	36 CTS1
RTS1	18	37 RxD1
TxD1	19	

RS-232 Female DB-37 Connector

Pin Assignment	Terminal No.	Pin Assignment
GND	05	09 RI
DTR	04	08 CTS
TxD	03	07 RTS
RxD	02	06 DSR
DCD	01	

RS-232 Female DB-37 to Male DB-9 Connector



CA-9-3705




CA-9-3715D

Ordering Information

CA-9-3705	Male DB-37 to 4 Male DB-9 Cable (90°), 0.3 m
CA-9-3715D	Male DB-37 to 4 Male DB-9 Cable (180°), 1.5 m

▶▶▶▶ CA-USB18

Pin Assignments

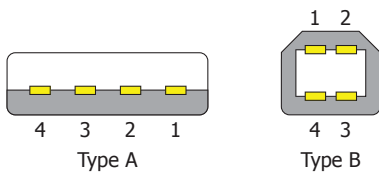

Pin	Name	Description
1	VCC	+5V
2	D-	Data-
3	D+	Data+
4	GND	Ground



Ordering Information

CA-USB18	USB Type A to Type B Cable, 1.8 m
----------	-----------------------------------