

8.5 Current Transformer




■ Features
■ AC/DC Source Input
■ Linear Attenuation Ratio
■ High Current Input Measurement
■ Isolation Input
■ Channel to Channel Isolation
■ 4 kV ESD Protection
■ RoHS Compliance
■ Operating Temperature: -25 ~ +75°C
■ Easily Wire Connection




■ Introduction

The maximum input range is from ± 1 A to ± 50 A and can be attenuated to from ± 1.6 V to ± 10 V. The "I" version provide 3000 Vdc intra-modules isolation and 3000 Vdc channel to channel isolation to avoid the noise interference from inputs to outputs or channel to channel. It can be used with the analog input modules such as I-7017 and I-87017 etc. to measure the high current.

■ Applications

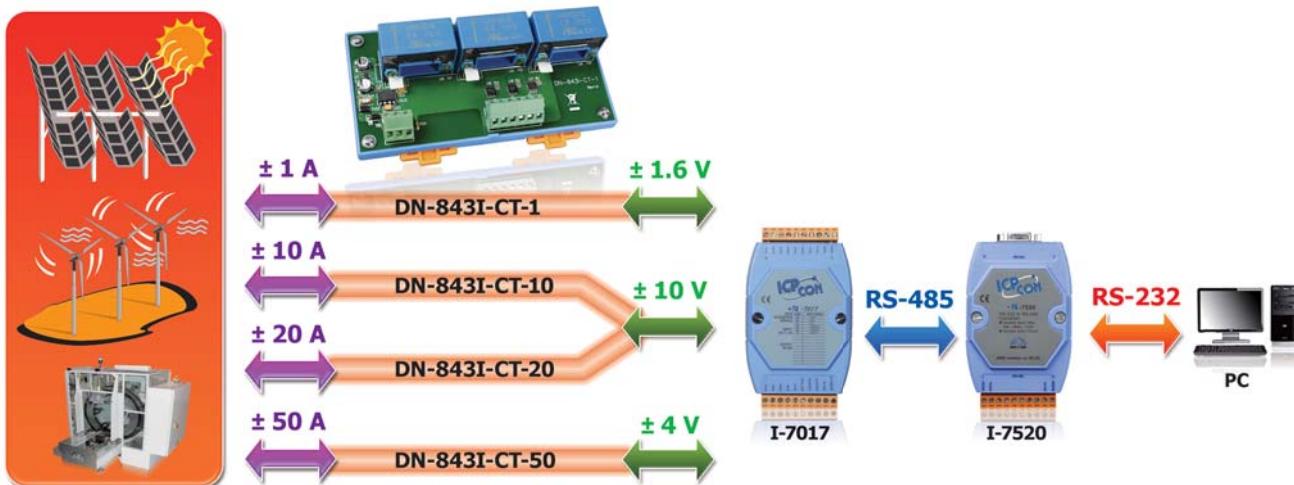



■ Installation

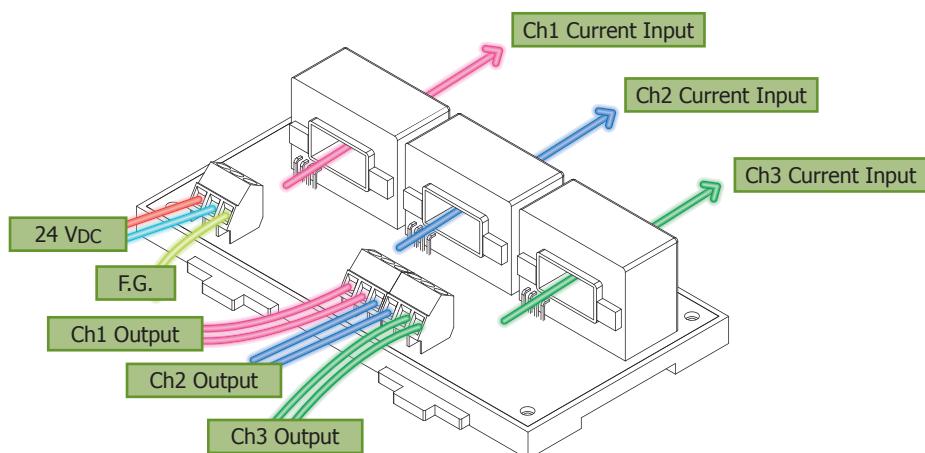


■ Specifications

Models	DN-843I-CT-1	DN-843I-CT-10	DN-843I-CT-20	DN-843I-CT-50
General				
Channels		3		
Input Type		AC/DC Current		
Input Range	+/-1 A	+/-10 A	+/-20 A	+/-50 A
Output Type		AC/DC Voltage		
Output Range	+/-1.6 Vpp	+/-10 Vpp	+/-10 Vpp	+/-4 Vpp
CT Type		Solid Core (closed)		
Accuracy	Zero \leq 100 mV, 3% of FSR		1% of FSR	
Chanel to Channel Isolation		Yes, 3000 Vrms		
Intra-module Isolation, Input to Output		3000 VDC		
Bandwidth		50 KHz		
Input Impedance		> 1 M Ω		
EMS Protection				
ESD (IEC 61000-4-2)	+/-4 kV contact for power line, input and output channels, +/-8 kV air for random point			
Power Input				
Input Range	+10 ~ +24 VDC			
Power Consumption	1.2 W			
Mechanical				
Dimensions (W x L x H)	148 mm x 83 mm x 39 mm			
Installation	DIN-Rail Mounting			
Environment				
Operating Temperature	-25 ~ + 75°C			
Storage Temperature	-30 ~ +75°C			
Humidity	10 ~ 90% RH (non-condensing)			

■ Dimensions (Units: mm)

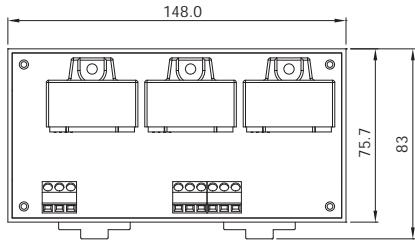


Left View




Front View

Right View

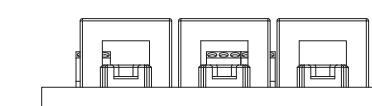

Top View

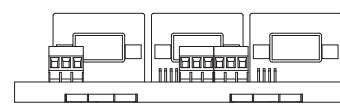

Bottom View

■ Selection Guide


DN-84



Number of Channels
3: 3 channels



I: Channel to channel Isolation



CT: Current Transformer



Input Current Range

■ Ordering Information

DN-843I-CT-1 CR	3-channel 1 A Current Transformer (RoHS)
DN-843I-CT-10 CR	3-channel 10 A Current Transformer (RoHS)
DN-843I-CT-20 CR	3-channel 20 A Current Transformer (RoHS)
DN-843I-CT-50 CR	3-channel 50 A Current Transformer (RoHS)

■ Accessories

	MDR-20-24 CR	24 V/1 A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
	I-7017-G CR	8-channel Analog Input Module (RoHS)
	I-87017-G CR	8-channel Analog Input Module (RoHS)